

RIDE-ON TROWELS



**MQ WHITEMAN**

**Hydrostatic and Mechanical  
Drive Models**



**MQ Whiteman** hydraulic ride-on power trowels deliver all the features contractors demand from high performance finishing equipment. Now, with innovative features such as SmartPitch, Power Management and Cruise Control we achieve maximum power and efficiency with minimum emissions. These remarkable machines will help improve your F-numbers and change the way you think about ride-on trowels.



Ergonomic seat reduces operator fatigue.

SmartPitch control synchronizes blade pitch of both rotors with a single touch.

Tubular steel tank design improves flow and cooling of hydraulic fluid.

Proportional hydraulic steering helps the operator move the machine effortlessly across the slab.

Frame design provides operator with excellent visibility of the finishing surface.

Service panels provide easy access to components for maintenance.

Integral steps are provided for convenience.

4 cylinder turbo diesel engine

Six lights are standard for illuminating night time and indoor work areas

Standard "Enduro" trowel blades last up to 50% longer than conventional blades.

Operator's platform includes a built-in storage box for hand tools and accessories.

(STXD6i shown. Called-out features are typical of all hydrostatic trowels.)

## THE STX SERIES

With a span of ten feet, it provides maximum coverage while enabling you to produce floors with consistently superior levels of flatness. Twin six-blade rotors are driven by a powerful 55-HP\* Yanmar turbo diesel engine chosen for its ability to withstand the tough concrete finishing environment.

### Warranty

Power Trowels, Ride-On (Hydraulic)

1 year parts and labor

Engine covered by manufacturer's warranty - (see Multiquip warranty terms for full details)



### Six-Blade Spider

- Exclusive on STX and HTXD6i Hydrostatic Trowels.
- Achieve 33% more blade contact for the fastest, flattest finish possible.
- Obtain superior maneuverability and control.
- Reduce wear on pans and blades due to outstanding balance and weight distribution.





**THE HTXD6i** reaches a top rotor speed of 160 RPM and produces 20% more HP than previous generations models.


- **SmartPitch® control** allows the operator to synchronize the pitch of both rotors with the simple touch of a button.
- **Power Management** senses load and adjusts hydraulic pump stroke to ensure the unit operates at peak efficiency under all conditions. Eliminates engine bogging under severe loads.
- **Cruise Control** enables operator to electronically lock in preferred rotor speed and reduces fatigue.
- **Hydrostatic drive** supplies optimum power to each rotor assembly for reliable performance. It reduces service costs by eliminating maintenance items such as belts, clutches and gearboxes.
- **Non-overlapping rotors** are powered by independent drive motors that consistently deliver the high torque required for pan applications and the high speed for final finishing.
- **Retardant spray system** is actuated by controls located on the steering handles for uniform coverage of the slab surface.
- **Adjustable seat** features armrests and provides essential back support. All controls and warning lights are convenient to the operator.
- **Automatic shut-down** beneath the seat stops the rotors from turning if the operator stands up while the engine is running.
- **Proportional hydraulic steering** has been enhanced and offers improved responsiveness with minimal effort on the part of the operator.

### Warranty


Power Trowels, Ride-On (Hydraulic)

1 year parts and labor

Engine covered by manufacturer's warranty-(See Multiquip warranty terms for full details)

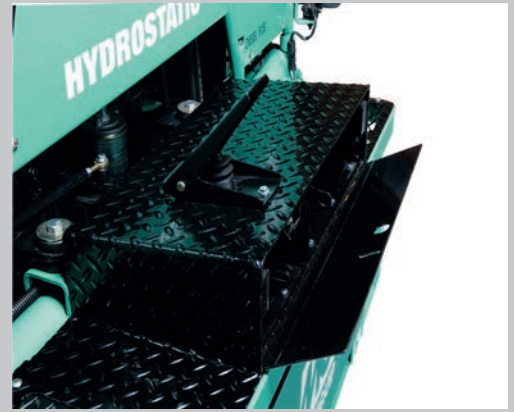

**Raised operator's platform** includes lockable storage compartment

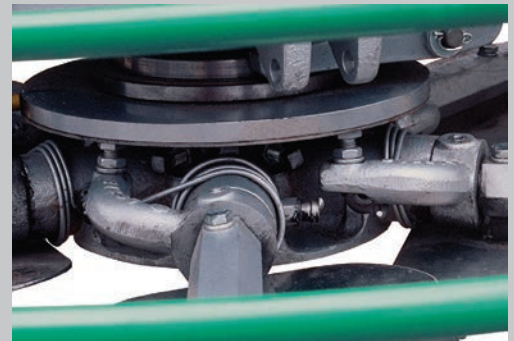

**Spider assemblies** feature long-lasting wear plates and spider hubs



**Operator Controls** are ergonomically designed and positioned for ease of use.




**Hinged panels** make servicing easy by allowing quick access to filters and trowel blades



**Removable steps** provide quick access to trowel blades



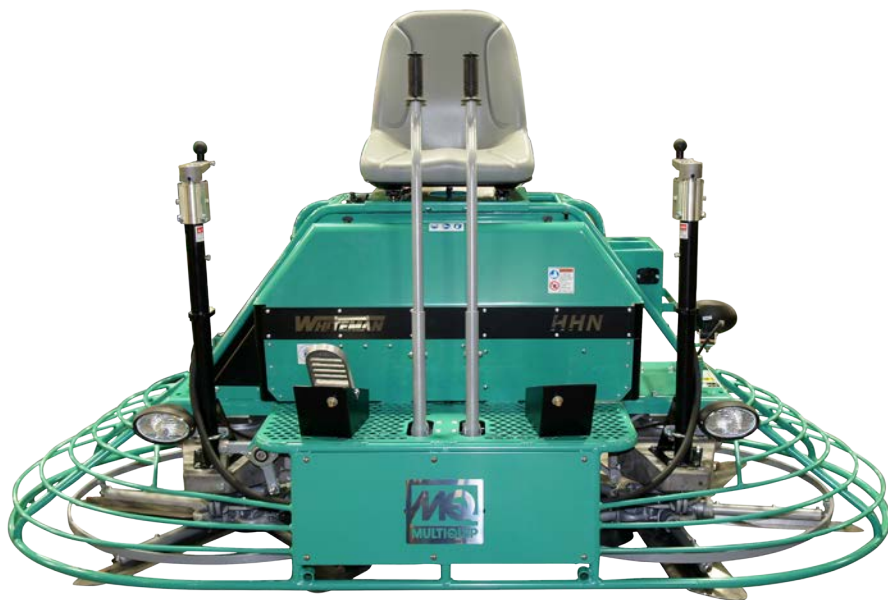

HHNG5

**THE HHN SERIES** is equipped with the coolest running gearbox in the industry. Power is supplied by a 35-HP Air Cooled Gasoline engine that spins twin five-blade rotors to a top speed of 180 RPM.


- **Operator is able to completely view the finishing surface** through the frame.
- **Retardant spray system is actuated** by controls located on the steering handles for uniform coverage of the slab surface.
- **Weather resistant polyethylene** fuel tank and battery box eliminates corrosion.
- **Halogen lights** provide illumination for night time or indoor work.
- **Servicing is made easy by a frame design** that allows quick access to fill ports and filters.
- **Rugged frame is made of chromemoly steel** to withstand the rigors of handling and transportation.
- **High-performance engines** withstand the rigors of concrete finishing.
- **Mechanical TwinPitch** control for fast, accurate adjustment of trowel blades.
- **Lifting points are built into the machine** for balanced lifting.
- **Spider assemblies can be economically rebuilt** and feature long-lasting wear plates and spider hubs.
- **Helical gearbox design is 33% more efficient** than worm drive designs resulting in cooler operating temperatures and longer service life.

#### Warranty

**Power Trowels, Ride-On Mechanical Models** - 1 year parts and labor

**HHN- series Helical Gearbox** - 3 years parts and labor

Engine covered by manufacturer's warranty. See Multi-quip terms for full details.

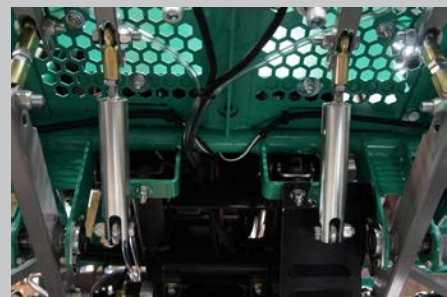

#### Patented steering assist

makes controlling the machine remarkably easy and reduces operator fatigue.



#### Automotive style CV-joints

ensure the consistent transfer of power to each gearbox.



Power is transmitted by to the rotors by **continuously variable transmission (CVT)** that adjusts the drive ratio to obtain optimum torque and speed during all phases of concrete finishing.



Proven heavy-duty worm-drive design features large oil capacities and integral cooling fans to reduce heat build-up and are standard equipment on HTN Series machines.

## THE HTN SERIES

The entry level eight foot mechanical. Models are available with Kohler carbureted or fuel injected gasoline engines, along with all the features you expect to find on a Whiteman ride-on trowel.



### Warranty

**HTN Power Trowels, Ride-On Mechanical Models** - 1 year parts and labor

**HTN-SERIES Worm Drive Gearbox** - 2 years parts and labor

Engine covered by manufacturer's warranty - (See Multiquip warranty terms for full details)



### Patented steering assist

makes controlling the machine remarkably easy and reduces operator fatigue.



### Automotive style CV-joints

ensure the consistent transfer of power to each gearbox.



**TwinPitch control**, available on all models, enables the operator to simultaneously control the pitch of both rotors with minimal effort yet still allows for individual pitch control.



## THE JWN SERIES

These versatile six-foot machines are ideal for jobs up to 6,000 sq. ft. Their lightweight design is ideal for high-rises and enable contractors to get on the slab faster. The JWN is equipped with heavy-duty gearboxes and a continuously variable transmission that delivers a lightning fast rotor speed of 180 RPM.




**TwinPitch control**, available on all models, enables the operator to simultaneously control the pitch of both rotors with minimal effort yet still allows for individual pitch control.

### **Warranty**

**JWN Series Mechanical Trowels** complete machine 1 year parts and labor

**JWN-series** Worm Drive Gearbox

**Engine covered by manufacturer's warranty** - (see Multiquip warranty terms for full details)

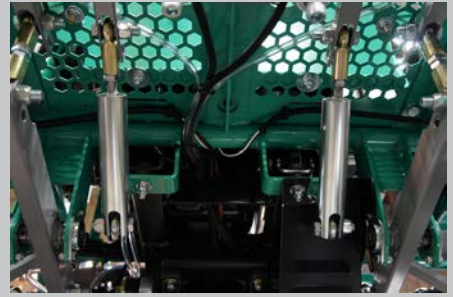

### **Patented steering assist**

makes controlling the machine remarkably easy and reduces operator fatigue.



### **Automotive style CV-joints**

ensure the consistent transfer of power to each gearbox.



# Trowel Blades and Pans



BLADES, PANS AND ACCESSORIES

Model	Blades for 24" Diameter Rotors (.075 steel thickness)		
C244	Combo Blade 5" x 9.25"	x	
<b>Blades for 30" Diameter Rotors (Finish .062"; Combo .075" steel thickness)</b>			
F300	Finish Blade 6" x 10.5"	x	
C334	Combo Blade 8" x 10.5"	x	
<b>Blades for 36" Diameter Rotors (Finish .062"; Combo .075" steel thickness)</b>			
C844	Combo Blade 8" x 14"	x	
C844R	Combo Blade 8" x 14"		x
CL954F	Float Blade 10" x 14"	x	x
F900	Finish Blade 6" x 14"	x	
<b>Quick Change Blades for 36" Diameter Rotors (Finish .062"; Combo .075" steel thickness)</b>			
QB1857	Blade Mounting Bar, One (1) required per trowel arm	x	x
QC1871	Combo Blade 8" x 14"	x	
QF1872	Finish Blade 6" x 14"	x	
QS1869	Snap Pin, Two (2) required per trowel arm	x	x
<b>Enduro Blades for 36" Diameter Rotors (Finish .092"; Combo .092" steel)</b>			
C10844	Combo Blade 8" x 14"		x
F10900	Finish Blade 6" x 14"		x
<b>Enduro-Quick Change Blades for 36" Diameter Rotors (Finish .092"; Combo .092" steel thickness)</b>			
QC10871	Combo Blade 6" x 14"		x
QF10872	Finish Blade 8" x 14"		x
<b>Blades for 46/48" Diameter Rotors (Finish .062"; Combo .075"; Float 12 G/.105" steel thickness)</b>			
C464	Combo Blade 8" x 18"	x	
C464R	Combo Blade 8" x 18"		x
CL444F	Float Blade 10" x 18"	x	x
F400	Finish Blade 6" x 18"	x	
<b>Quick Change Blades for 46/48" Diameter Rotors (Finish .062"; Combo .075" steel thickness)</b>			
QB1856	Blade Mounting Bar, One (1) required per trowel arm	x	x
QC1873	Combo Blade 8" x 18"	x	
QF1874	Finish Blade 6" x 18"	x	
QS1869	Snap Pin, Two (2) required per trowel arm	x	x
<b>Enduro Blades for 46/48" Diameter Rotors (Finish .092"; Combo .092" steel thickness)</b>			
C10464	Combo Blade 8" x 18"		x
F10400	Finish Blade 6" x 18"		x
RC818	Reversible Combo Blade 8" x 18"		x
<b>Enduro-Quick Change Blades for 46/48" Diameter Rotors (Finish .092"; Combo .092" steel thickness)</b>			
QC10873	Combo Blade 6" x 18"		x
QF10874	Finish Blade 8" x 18"		x
<b>Blades for 48" Diameter 6-Blade Rotors (Finish .075"; Combo .075" steel thickness)</b>			
F616	Finish Blade 6" x 16"		x
C8160	Comb Blade 8.125" x 16"		x
<b>Enduro Blades for 48" Diameter 6-Blade Rotors (Finish .092"; Combo .092" steel thickness)</b>			
F10616	Finish Blade 6" x 16", 48"		x
C10816	Combo Blade 8.125" x 16"		x
RC816	Reversible Comb Blade 8.125" x 16"		x
<b>Enduro Blades for 60" Diameter Rotors (Finish .092"; Combo .092" steel thickness)</b>			
C11997	Combo Blade 8" x 23"		x
F11990	Finish Blade 6" x 23"		x
<b>Model Float Pan Description</b>			
20646	Latch Pin for Float Pans	x	x
21550	24", 4-Blade Flat Pan	x	
2870	36", 4-Blade Flat Pan w/block	x	
2871	46", 4-Blade Flat Pan w/block	x	
11032	36", 4-Blade Superflat Pan		x
11017W	46", 4-Blade Superflat Pan		x
12271	46", 4-Blade Flat Pan	x	x
12272	46", 5-Blade Superflat Pan		x
12093W	46", 5-Blade Superflat Pan		x
32026W	46", 6-Blade Superflat Pan		x
11979	60", 6-Blade Superflat Pan		x


## Accessories



**EMR3 transport dolly** for ease of maneuverability around the shop or jobsite.



**EMR2 transport dolly** for moving mechanical trowels around the workplace or on the jobsite.



**Trowel Arm Fixture**  
Quickly check the alignment of each trowel arm with this simple tool.



# Specifications

Model	Engine	Engine Cooling	HP*	Blades Per Rotor	Rotor RPM	Path Width in. (cm)	Fuel Tank Capacity gal. (ltr)	Run Time gal./hr. (ltr/hr)	LxWxH in. (cm)	Operating Weight lbs. (kg)	Wheel Kit
<b>Twin 60" Non-Overlapping</b>											
STXD6i	Yanmar Turbo Diesel	Liquid	55	6	10-130	117 (297)	11 (42)	2.81 (10.63)	125 x 65 x 57 (318 x 165 x 145)	2270 (1030)	EMR3
<b>Twin 48" Non-Overlapping</b>											
HTXD6i	Yanmar Turbo Diesel	Liquid	55	6	10-160	92 (233)	11 (42)	2.36 (8.93)	95 x 48 x 57 (241 x 122 x 145)	2,100 (952)	EMR3
<b>Twin 48" Non-Overlapping</b>											
HHXD5	Vanguard Turbo	Liquid	34	5	0-180	91 (231)	9 (34)	1.58 (5.98)	98 x 50 x 54 (249 x 127 x 137)	1440 (658)	EMR2 or EMR3
<b>Twin 48" Non-Overlapping</b>											
HHNG5	Vanguard Turbo	Air	35	5	0-180	92 (233)	5 (19)	2 (7.57)	95 x 48 x 59 (318x165x145)	1083 (491)	EMR2 or EMR3
<b>Twin 48" Non-Overlapping</b>											
HTN27KTCSL	Kohler	Air	25	4	40-140	91 (231)	4.4 (17)	2 (7.57)	95 x 48 x 46 (241 x 122 x 117)	780 (354)	EMR2
HTN28KTCSL	Kohler	Air	28	4	40-140	91 (231)	4.4 (17)	2 (7.57)	95 x 48 x 46 (241 x 122 x 117)	800 (363)	EMR2
<b>Twin 36" Non-Overlapping</b>											
JWN24HTCSL	Honda	Air	20	4	36-180	75 (191)	2.2 (8)	1.71 (6.47)	77 x 39 x 48 (196 x 99 x 122)	685 (209)	EMR2

\*\*For current production units only. May not adapt to older models.

Models listed are equipped with TwinPitch control, Halogen Lights and Spray System. Batteries are included.

\* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:

Connect with us on

